Product Description

1) Рабочая частота: 50-60 Гц
2) блок питания: 5 в/1 а
3) мощность: 5 Вт (максимум)
4) Рабочая температура: от 0 до 30 ℃
5) Материал оболочки: алюминиевый сплав
1 Высота: 9 мм
2 интерфейс: SATA (нечетный)-13пин (6 + 7) (жесткий диск), поддерживает стандарт SATA-I/SATA-/SATA II-III. Поддержка наивысшей скорости передачи 6 Гбит/с. 3 косметическая панель: может соответствовать оригиналу.
4 размер (L * W * H): 130 * 127 * 9 мм
5 то же, что и общий оптический драйвер
Поддержка 6 жестких дисков: 2, 5-дюймовый жесткий диск с поддержкой SATA или SATA
7 совместимая модель: применимы новые модели HP, Dell, Бенк, ASUS, настольных систем, отличная стена и все интерфейсы IDE-накопителей (9 мм)
8 следующие модели подтверждены
9 полностью поддерживают эту скобу: ASUS ф8ва. Samsung p518. Toshiba Динабук TX/66хбл. Хп6535б хп6930п. хасиа560
10 аксессуаров:
1 9 мм
1 * отвертка
винты
11 Примечание: жесткий диск, косметическая панель и дисковод DVD-дисков не включены
12 гарантия 12 месяцев
13 условие 100% новая марка
Сертификат

Product Picture

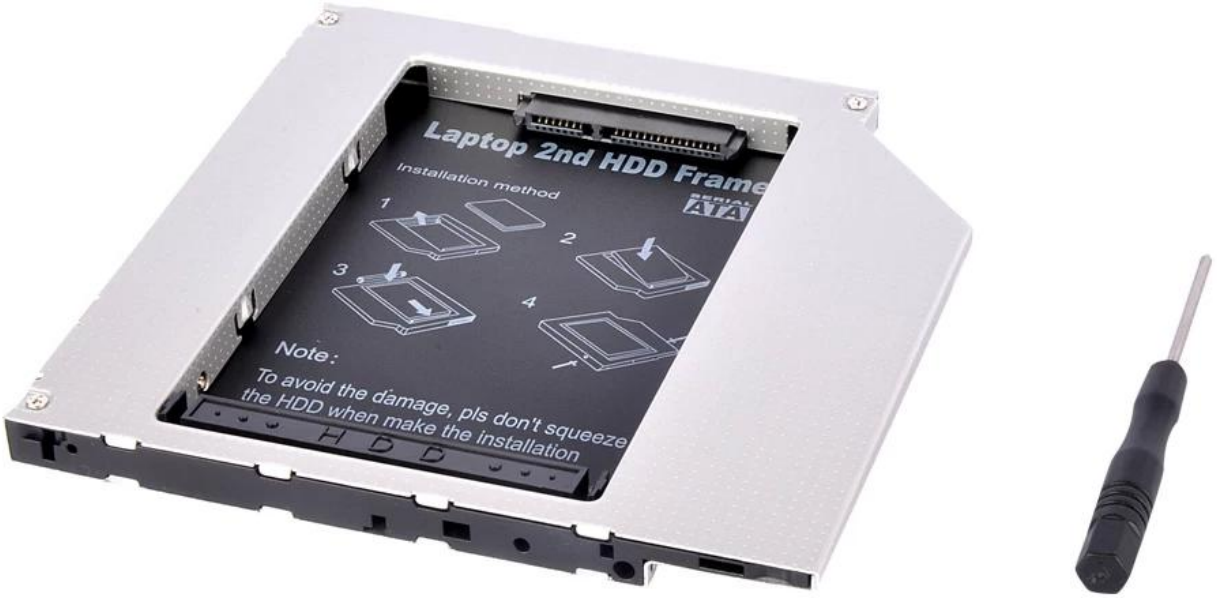
Laptop 2nd HDD Frame
Installation method
1
2
3
4
Note:
To avoid the damage, pls don't squeeze the HDD when make the installation
HDD

SERIAL ATA
Installation method
1
2
3
4
Note :
To avoid the damage, pls don't squeeze the HDD when make the installation
MADE IN CHINA
HDD

HD9001-SS

use 2.5" SSD
or HDD
2nd HDD Caddy
Insert HDD or SSD into drive caddy
and secure at bottom with the
4 screws provided
Insert caddy with HDD (or SSD)
in optical drive bay